


CML 16 CHASSIS MOUNTED MAINTENANCE LIFT

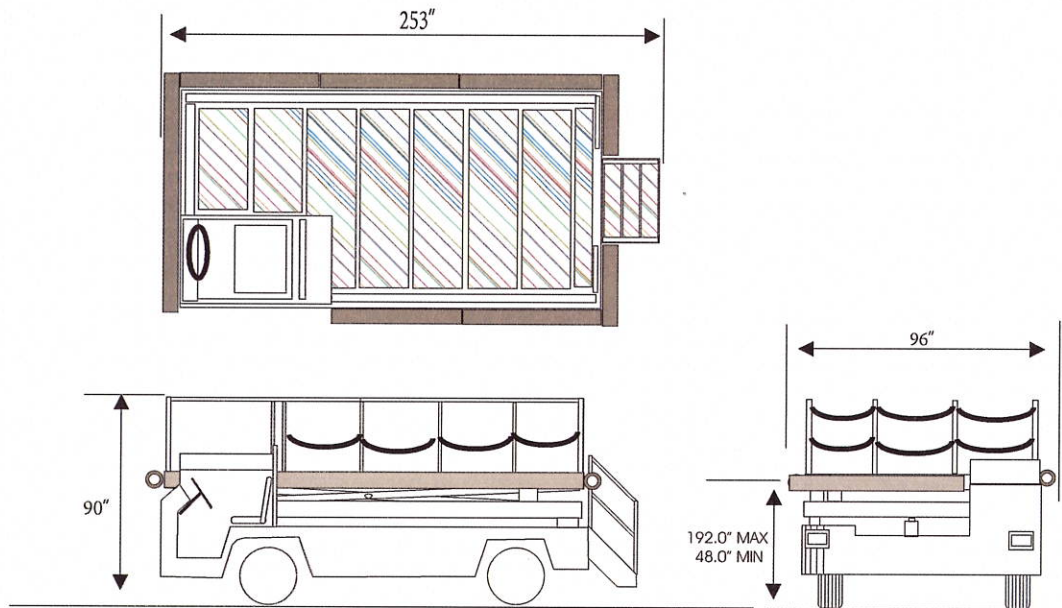

SPECIFICATIONS

CHASSIS:

HEAVY DUTY SHEET METAL WITH 3/8 STEEL
PLATE FRONT AND REAR

SUSPENSION:

SOLID MOUNT FRONT AND REAR

STEERING:

HYDROSTATIC - ORBITROL/ CYLINDER

AXLES:

DRIVE AXLE - CURRIE/ DANA 60 LIMIT SLIP 7.17:1 RATIO
STEER AXLE - CURRIE/ DANA 60

BRAKES:

DUAL SPLIT SYSTEM - HYDRAULIC ASSIST
FRONT/ REAR DISC BRAKES

ELECTRICAL SYSTEM:

12 VOLT - NEGATIVE GROUND
60 AMP ALTERNATOR

HYDRAULIC SYSTEM:

ENGINE DRIVEN - POSITIVE DISPLACEMENT
EMERGENCY PUMP

TRANSMISSION:

FORD INDUSTRIAL C6
DIESEL - 3 SPEED
GAS - 2 SPEED

ENGINE:

DEUTZ DIESEL - F4M2011 3.1 L 4 CYL OIL COOLED
ISUZU DIESEL - 4LE1 2.2L
FORD GAS - MSG425

Capacity:

1500 LBS

STRUCTURE:

- * SCISSOR ARMS ARE MADE FROM 3/16
WALL STRUCTURAL STEEL TUBING
- * PRECISION MACHINED BUSHINGS
- * 100,000 PSI STRESS PROOF PIVOT SHAFTS
- * CORROSION PROOF ROLLERS

PLATFORM:

- * 200" L X 72" W STANDARD
- * REMOVABLE TRACTION TREAD DECK PANELS
- * ALL WELDED CONSTRUCTION
- * 7" OD NON-MARRING BUMPERS AROUND
PERIMETER
- * 1-1/4" SQUARE COLLAPSIBLE HANDRAILS

HYDRAULIC:

- * ENGINE DRIVEN HYDRAULIC PUMP
- * SINGLE STAGE CYLINDER
- * STAINLESS STEEL HYDRAULIC TANK
- * SAFETY HOLDING VALVES
- * ELECTRICAL AND MANUAL EMERGENCY PUMPS

ELECTRICAL:

- * UPPER AND LOWER CONTROLS
- * LOWER CONTROL OVERRIDE
- * ELECTRICAL EMERGENCY PUMP
- * WEATHER TIGHT CONTROL BOXES
- * OPERATIONAL SAFETY CIRCUIT
- * STABILIZER AND DRIVE INTERLOCKS

SHIPPING DIMENSIONS:

LENGTH 253"
WIDTH 96"
HEIGHT 90"
WEIGHT 9700 LBS